

# BEST AVAILABLE COPY

Document Name: Petition for Patent  
Docket No.: 167015  
Date of Application: September 17, 1999  
Addressee: Commissioner, Patent Office  
International Patent  
Classification: C08K 3/34

## Inventor(s):

Address: c/o Yodogawa Works of DAIKIN INDUSTRIES,  
LTD., 1-1, Nishihitotsuya, Settsu-shi,  
Osaka-fu  
Name: Kazuyuki SATO  
Address: (ditto)  
Name: Masamichi MORITA  
Address: (ditto)  
Name: Fumihiko YAMAGUCHI  
Address: (ditto)  
Name: Yasushi NAKAMAE  
Address: (ditto)  
Name: Hiroko YANO

## Applicant(s):

Identification No.: 000002853  
Address: Umeda Center Building, 4-12, Nakazaki-  
nishi 2-chome, Kita-ku, Osaka-shi,  
Osaka-fu  
Name: DAIKIN INDUSTRIES, LTD.

## Patent Attorney:

Identification No.: 100062144  
Name: Tamotsu AOYAMA

## Appointed Patent Attorney:

Identification No.: 100083356  
Name: Yasuo SHIBATA

## Payment of Fees:

Procedure: Prepaid  
Prepayment Book No.: 013262  
Amount to be paid: 21,000

## Attached document(s):

Item: Specification 1 copy  
Item: Abstract 1 copy  
Registration No.  
of General Power: 9717866

# BEST AVAILABLE COPY

PATENT OFFICE  
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy  
of the following application as filed with this Office.

Date of Application: September 17, 1999

Application Number: Patent Application No. 263591/1999 (JP11-263591)

Applicant(s): DAIKIN INDUSTRIES, LTD.

Commissioner,  
Japan Patent Office

# BEST AVAILABLE COPY

Attorney Docket No.: Q68961

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Kazuyuki SATO et al.

Serial No.: 10/088,290

Filed: March 15, 2002

For: SURFACE TREATMENT AGENT COMPRISING INORGANIC-ORGANIC  
HYBRID MATERIAL

Group Art Unit: 1773

Examiner: Ramsey Zacharia

**RECEIVED**

**MAR 11 2004**


**TC 1700**

## VERIFICATION OF ENGLISH TRANSLATION

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

I, Katsutoshi Shinmen of c/o AOYAMA & PARTNERS, IMP Building, 1-3-7, Shiromi, Chuo-ku, Osaka 540-0001 Japan, declare that I am conversant in both the Japanese and English languages and that the English translation as attached hereto is an accurate translation of Japanese Patent Application No. 263591/1999 filed on September 17, 1999.



Katsutoshi Shinmen

Dated this 2nd day of March, 2004

[Document name] Specification

[Title of Invention] SURFACE TREATMENT AGENT COMPRISING  
INORGANIC-ORGANIC HYBRID MATERIAL

5

[Claims]

1. A surface treatment agent,

wherein, when a fiber is treated with the surface treatment agent,  
the treated fiber has following characteristics (1) to (3):

10 (1) in a soil release test, a numerical value, after cleaning,  
of soil release rate shown in the following equation is at least  
30%,

$$\text{Soil release rate (\%)} = 100 \times (\Delta E_N - \Delta E_{Tn}) / \Delta E_N$$

15  $\Delta E_N$ : Color difference of untreated carpet after soil  
release test,

$\Delta E_{Tn}$ : Color difference of carpet treated with the surface  
treatment agent after soil release test (n: number of cleaning  
(n is an integer of 1 to 20));

20 (2) in a surface analysis of a coating film by an IR-ATR method,  
a numerical value of a residual rate, after cleaning, of the  
surface treatment agent shown in the following equation is at  
least 10%,

$$\text{Residual rate (\%)} = 100 \times (A_2/A_1)$$

$A_1$ : IR intensity ratio before cleaning,

25  $A_2$ : IR intensity ratio after cleaning; and

(3) a Knoop hardness (KH) of the surface treatment agent is at least 5.

2. A surface treatment agent comprising;

5 (A) a metal alkoxide, and

(B) a polymer comprising

(B-i) a monomer having a carbon-carbon double bond  
and a metal alkoxide group,

10 (B-ii) a fluorine-free (meth)acrylic acid  
derivative monomer, and

(B-iii) a fluorine-containing compound having a  
functional group reactive with the metal  
alkoxide, or

15 (B-iv) a fluorine-containing monomer having a  
carbon-carbon double bond.

3. A surface treatment agent comprising;

(A) a metal alkoxide, and

(C) a copolymer comprising

20 (C-i) a fluorine-free (meth)acrylic acid derivative  
monomer, and

(C-ii) a fluorine-containing monomer having a  
carbon-carbon double bond.

25 4. A surface treatment agent comprising;

(A) a metal alkoxide,

(D) a polymer comprising

(D-i) a fluorine-free (meth)acrylic acid derivative  
monomer, and

5 (E) a fluorine-containing compound having a functional  
group reactive with the metal alkoxide.

5. The treatment agent according to claim 2, 3 or 4, wherein  
the number of alkoxide groups in the metal alkoxide (A) is from  
10 1 to 12.




6. The treatment agent according to claim 2, 3 or 4, wherein  
a metal in the metal alkoxide (A) is selected from the group  
consisting of Si, Ti, Al, Zr, Sn and Fe.

15 7. The treatment agent according to claim 2, wherein a metal  
atom in the monomer having carbon-carbon double bond and metal  
alkoxide group (B-i) is selected from the group consisting of  
Si, Ti, Al, Zr, Sn and Fe.

20 8. The treatment agent according to claim 2 or 4, wherein the  
functional group in the fluorine-containing compound having  
functional group reactive with metal alkoxide (B-iii) or (E)  
is a reactive group selected from the group consisting of an  
25 alkoxy silane group, a carboxyl group, a hydroxyl group, an epoxy

group, a phosphate group, a halogenated silyl group, a sulfonate group, an isocyanate group and a blocked isocyanate group.

9. The treatment agent according to claim 2 or 3, wherein the  
5 fluorine-containing monomer having carbon-carbon double bond (B-iv) or (C-ii) is at least one material selected from the group consisting of the group of:



wherein n is from 0 to 10.

10. A coated film formed from the treatment agent according to claim 2 or 3 or 4, wherein the coated film comprises an uneven  
15 layer having the whole surface which is roughened by forming microscopic unevenness and a surface roughness of the uneven layer of the coated film is a maximum height ( $R_{\text{max}}$ ) of 0.01 to 100  $\mu\text{m}$ .

20 11. The coated film according to claim 10, wherein a thickness of the coated film is from 0.001 to 100  $\mu\text{m}$ .

[Detail Explanation of Invention]

[0001]

25 FIELD OF THE INVENTION

The present invention relates to a surface treatment agent which imparts a superior soil release property, even after dry cleaning, to a substrate to be treated, such as a textile and has a high residence.

5 [0002]

#### PRIOR ARTS

Hitherto, various soil release treatment agents are suggested in order to impart water repellency, oil repellency and soil releasability to textiles (for example, carpets).  
10 JP-B-48-8606 discloses that the soil release property is imparted by treating fibers with a homopolymer prepared by polymerizing an unsaturated carboxylate ester having perfluoroalkyl groups at both ends. However, the soil release property imparted by this homopolymer is insufficient.

15 [0003]

JP-B-51-3767 discloses that water repellency and oil repellency are imparted to fibers by treating fibers with a polymer prepared by copolymerizing (i) a maleate or fumarate ester having a perfluoroalkyl group at one end and having an  
20 aliphatic or aromatic group free from a fluorine atom at other end and (ii) another polymerizable unsaturated compound. Because one of end groups of the maleate or fumarate ester is free from a fluorine atom, the polymerizability is good. However, the water- and oil-repellency and the soil release property  
25 imparted by this polymer are insufficient.



[0004]

USP 3,594,353 discloses that water repellency and soil release property against oil are imparted to fibers by treating fibers with a polymer prepared by homopolymerizing an itaconate ester having a perfluoroalkyl group at both ends or one end or by copolymerizing the itaconate ester with another polymerizable unsaturated compound. However, the water- and oil-repellency and the soil release property imparted by this polymer are insufficient.

10 J. Applied Polymer Science, 65 (12), 2387 (1997) discloses that the water repellency and the glass protection are imparted by providing a hydrophobic inorganic-organic hybrid material thin film on a glass plate. However, the water- and oil-repellency and the soil release property of this hybrid material are  
15 insufficient.

[0005]

None of conventionally proposed soil release agents has sufficient water- and oil-repellency, soil releasability and cleaning durability.

20 Initial water- and oil-repellency and soil releasability, immediately after the treatment, of carpets treated with the above conventional methods are superior to those of untreated carpets. However, the initial water- and oil-repellency and soil releasability of the treated carpets are insufficient and,  
25 additionally, the cleaning durability of the treated carpets

is insufficient.

[0006]

#### PROBLEMS TO BE SOLVED BY THE INVENTION

An object of the present invention is to provide a treatment  
5 agent (for example, a treatment agent for carpet) which imparts  
durability maintaining sufficient water repellency, oil  
repellency and soil releasability before and after cleaning.

[0007]

#### MEANS FOR SOLVING THE PROBLEMS

10 The present invention provides a surface treatment agent,  
wherein, when a fiber is treated with the surface treatment agent,  
the treated fiber has following characteristics (1) to (3):  
(1) in a soil release test, a numerical value, after cleaning,  
of soil release rate shown in the following equation is at least  
15 30%,

$$\text{Soil release rate (\%)} = 100 \times (\Delta E_N - \Delta E_{Tn}) / \Delta E_N$$

$\Delta E_N$ : Color difference of untreated carpet after soil  
release test,

$\Delta E_{Tn}$ : Color difference of carpet treated with the surface  
20 treatment agent after soil release test (n: number of cleaning  
(n is an integer of 1 to 20)),

(2) in a surface analysis of a coating film by an IR-ATR method,  
a numerical value of a residual rate, after cleaning, of the  
surface treatment agent shown in the following equation is at  
25 least 10%,

Residual rate (%) =  $100 \times (A_2/A_1)$

A<sub>1</sub>: IR intensity ratio before cleaning,

A<sub>2</sub>: IR intensity ratio after cleaning, and

(3) a Knoop hardness (KH) of the surface treatment agent is at  
5 least 5.

[0008]

The present invention provides a surface treatment agent  
comprising;

(A) a metal alkoxide, and

10 (B) a polymer comprising

(B-i) a monomer having a carbon-carbon double bond  
and a metal alkoxide group,

(B-ii) a fluorine-free (meth)acrylic acid  
derivative monomer, and

15 (B-iii) a fluorine-containing compound having a  
functional group reactive with the metal  
alkoxide, or

(B-iv) a fluorine-containing monomer having a  
carbon-carbon double bond.

20 Furthermore, the present invention provides a surface  
treatment agent comprising;

(A) a metal alkoxide, and

(C) a polymer comprising

(C-i) a fluorine-free (meth)acrylic acid derivative  
25 monomer, and

(C-ii) a fluorine-containing monomer having a carbon-carbon double bond.

[0009]

Additionally, the present invention provides a surface  
5 treatment agent comprising;

(A) a metal alkoxide,

(D) a polymer comprising

(D-i) a fluorine-free (meth)acrylic acid derivative monomer, and

10 (E) a fluorine-containing compound having a functional group reactive with the metal alkoxide.

[0010]

The polymer (B) is a copolymer which comprises:

(B-i) a monomer having a carbon-carbon double bond and a metal  
15 alkoxide group,

(B-ii) a fluorine-free (meth)acrylic acid derivative monomer,  
and

(B-iii) a fluorine-containing compound having a functional group reactive with the metal alkoxide, or

20 (B-iv) a fluorine-containing monomer having a carbon-carbon double bond.

The polymer (C) is a copolymer which comprises:

(C-i) a fluorine-free (meth)acrylic acid derivative monomer,  
and

25 (C-ii) a fluorine-containing monomer having a carbon-carbon

double bond.

The polymer (D) is a homopolymer or copolymer which comprises:

(D-i) a fluorine-free (meth)acrylic acid derivative monomer.

5 [0011]

The fluorine-free (meth)acrylic acid derivative monomer (B-ii) in the polymer (B), the fluorine-free (meth)acrylic acid derivative monomer (C-i) in the polymer (C), and the fluorine-free (meth)acrylic acid derivative monomer (D-i) in  
10 the polymer (D) are similar.

The fluorine-containing monomer having the carbon-carbon double bond (B-iv) in the polymer (B), and the fluorine-containing monomer having the carbon-carbon double bond (C-ii) in the polymer (C) are similar.


15 The fluorine-containing compound having the functional group reactive with the metal alkoxide (B-iii) in the polymer (B), and the fluorine-containing compound having the functional group reactive with the metal alkoxide (E) are similar.

A weight-average molecular weight of the polymers (B), (C) and (D) may be from 5,000 to 500,000, for example from 10,000  
20 to 200,000 (measured by GPC).

[0012]

The metal alkoxide (A) is hydrolysis polymerizing organometallic compound and has at least one alkoxy group. The  
25 metal alkoxide (A) may be a compound represented, for example,


by the general formula:



wherein each  $R^{11}$  is a methacryloxy group, an acryloxy group, a vinyl group-containing organic group, an alkyl group, a vinyl group, an aryl group or an epoxy group-containing organic group, each  $R^{12}$  is an alkyl group, an alkoxyalkyl group or an aryl group, M is a metal, and a is from 0 to 3, b is from 0 to 4,  $a+b = 2$  to 4, d is 1 or 0, e is 1 or 0,  $d+e = 1$ , f is from 0 to 10, for example, from 0 to 4, g is from 0 to 3, h is from 0 to 3,  $g+h = 1$  to 3, and at least one of b, e and h is at least 1.

[0013]

The metal alkoxide (A) may be a compound represented, for example, by the general formula:



wherein  $R^{11}$  is a methacryloxy group, an acryloxy group, a vinyl group-containing organic group, an alkyl group, a vinyl group, an aryl group or an epoxy group-containing organic group,  $R^{12}$  is an alkyl group, an alkoxyalkyl group or an aryl group, M is a metal, m is from 2 to 5, in particular 3 or 4, n is from 0 to 2, in particular 0 or 1, and  $m+n$  is from 3 to 5, in particular 4.

[0014]

The number of alkoxy groups in the metal alkoxide (A) may be from 1 to 12, for example from 1 to 4.

The number of carbon atoms in the alkyl group ( $R^{11}$  and  $R^{12}$ )

is, for example, from 1 to 6. The number of carbon atoms in the aryl group is, for example, from 6 to 18. The number of carbon atoms in the vinyl group-containing organic group and the epoxy group-containing organic group is, for example, from 2 to 6. Examples of the vinyl group-containing organic group include an vinyl group. Examples of the epoxy group-containing organic group include a glycidyl group. In the alkoxyalkyl group, the number of carbon atoms in the alkoxy group may be from 1 to 6, for example, and the number of carbon atoms in the alkyl group may be from 1 to 6.

[0015]

Examples of M (metal) include silicon (Si), titanium (Ti), aluminium (Al), zirconium (Zr), tin (Sn) and iron (Fe).


Examples of the metal alkoxide (A) include tetraethoxysilane  $[\text{Si}(\text{OCH}_2\text{CH}_3)_4]$  (functionality of 4), methyltriethoxysilane  $[\text{CH}_3\text{Si}(\text{OCH}_2\text{CH}_3)_3]$  (functionality of 3), dimethyldiethoxysilane  $[(\text{CH}_3)_2\text{Si}(\text{OCH}_2\text{CH}_3)_2]$  (functionality of 2), trimethylethoxysilane  $[(\text{CH}_3)_3\text{SiOCH}_2\text{CH}_3]$  (functionality of 1), and ethoxysiloxane oligomer  $[(\text{CH}_3\text{CH}_2\text{O})_3\text{Si}-\{\text{O}-\text{Si}(\text{OCH}_2\text{CH}_3)_2\}_n-(\text{OCH}_2\text{CH}_3)]$  ( $n = 1$  to  $4$ ) (functionality of 6 to 12).

[0016]

The monomer having the carbon-carbon double bond and the

metal alkoxide group (B-i) may have a metal alkoxide group having at least one (for example, three) alkoxy group.

The metal alkoxide group may be, for example, of the formula:





5 wherein M is a metal such as Si, Ti, Al, Zn, Sn and Fe,  $R^3$  is an alkyl group having 1 to 4 carbon atoms, and n is from 1 to 3.

[0017]

10 The monomer having the carbon-carbon double bond and the metal alkoxide group (B-i) may be compounds represented by the formulas:

[Chemical formula 1]



15 wherein  $R^4$ ,  $R^5$ ,  $R^6$  and  $R^7$  are, the same or different, a hydrogen atom or an alkyl group having 1 to 4 carbon atoms,  $A^1$  is a direct bond or divalent organic group,  $M^1$  is a metal such as Si, Ti, Al, Zn, Sn and Fe, and n is from 1 to 3.

20 The monomer having the carbon-carbon double bond and the metal alkoxide group (B-i) include an alkoxysilyl group-containing monomer and an alkoxytitan group containing




monomer.

[0018]

Examples of the alkoxysilyl group-containing monomer are, for example, are as follows:




[Chemical formula 2]




(3-methacroxypropyltrimethoxysilane)

10 [Chemical formula 3]



(3-methacroxypropyltriethoxysilane)

[Chemical formula 4]




15 (N-[2-(Vinylbenzylamino)ethyl]-3-aminopropyltrimethoxysilane hydrochloride)

[0019]

Examples of the alkoxytitan group-containing monomer are, for example, are as follows:

20 [Chemical formula 5]



(titan methacrylate isopropoxide).

[0020]

5 The amount of the monomer having the carbon-carbon double bond and the metal alkoxide group (B-i) may be from is from 0.1 to 200 parts by weight, for example, from 50 to 100 parts by weight, based on 100 parts by weight of the metal alkoxide (A).

[0021]

10 The fluorine-free (meth)acrylic acid derivative monomers (B-ii), (C-i) and (D-i) have excellent adherence to the substrate to be treated, even if the carpet is cleaned. The fluorine-free (meth)acrylic acid derivative monomer does not contain (meth)acrylic acid itself.


15 Examples of the fluorine-free (meth)acrylic acid derivative monomer include a (meth)acrylate, and a (meth)acrylic group-containing (acrylic group:  $\text{CH}_2=\text{CH}-$ ) nitrogen compound [for example, (meth)acrylamide and (meth)acrylonitrile].

20 The (meth)acrylate may be selected from the group consisting of alkyl (meth)acrylate, polyalkyleneglycol (meth)acrylate, 3-chloro-2-hydroxypropyl (meth)acrylate and glycerol mono(meth)acrylate. The (meth)acrylate may be used alone or in combination of at least two.

[0022]

The alkyl (meth)acrylate has, for example, the following structure:

[Chemical formula 6]



5 wherein X is a hydrogen atom or a methyl group, and  
n is from 1 to 22 (for example, from 1 to 10).

[0023]

Specific examples of the (meth)acrylate are methyl  
(meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate,  
10 n-butyl (meth)acrylate, t-butyl (meth)acrylate, n-octyl  
(meth)acrylate, 2-ethylhexyl (meth)acrylate, dodecyl  
(meth)acrylate, cetyl (meth)acrylate, stearyl (meth)acrylate  
and behenyl (meth)acrylate.


[0024]

15 The polyalkyleneglycol (meth)acrylate has, for example,  
the following structure:  $\text{CH}_2=\text{CR}^{21}\text{COO}-(\text{R}^{22}-\text{O})_n-\text{R}^{23}$   
wherein  $\text{R}^{21}$  and  $\text{R}^{23}$  are a hydrogen atom or a methyl group,  
 $\text{R}^{22}$  is an alkylene group having 2 to 6 carbon atoms, and  
n is an integer of 1 to 50.

20 [0025]

Specific examples of the polyalkyleneglycol  
(meth)acrylate are


2-hydroxyethyl (meth)acrylate,



wherein n is 2, 5 or 8.

[0026]

3-Chloro-2-hydroxypropyl (meth)acrylate is represented by the formula:



wherein  $\text{R}^{31}$  is a hydrogen atom or a methyl group.

Glycerol mono (meth)acrylate is represented by the formula:



wherein  $\text{R}^{41}$  is a hydrogen atom or a methyl group.

10 [0027]

The (meth)acrylic group-containing nitrogen compound includes (meth)acrylamide, N,N-dimethylacrylamide, (meth)acrylonitrile, dimethylaminoethyl (meth)acrylate, diethylaminoethyl (meth)acrylate, diacetoneacrylamide, N-methylolacrylamide, N,N-dimethylaminoethyl acrylate, N,N-dimethylaminoethyl methacrylate, 3-chloro-2-hydroxypropyl methacrylate, trimethylammonium ethyl methacrylate chloride, methacryloxyloxyethyltrimethylammonium chloride, 2-hydroxy-3-methacryloxyloxypropyltrimethylammonium chloride, (meth)acrylate having a blocked isocyanate group, (meth)acrylate having at least one urethane or urea linkage.

[0028]


The amount of the fluorine-free (meth)acrylic acid derivative monomers (B-ii), (C-i) and (D-i) may be from 0.1 to

25

200 parts by weight, for example, from 0.25 to 10 parts by weight, based on 100 parts by weight of the metal alkoxide (A).

[0029]

The fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E) may be, for example, a compound:



wherein Rf is a fluoroalkyl group, X<sup>1</sup> is a reactive group selected from the group consisting of an alcoxysilane group, a carboxyl group, a hydroxyl group, an epoxy group, a phosphate group, a halogenated silyl group, or a sulfonate group, an isocyanate group and a blocked isocyanate group.

[0030]

The number of carbon atoms in the Rf group may be from 3 to 21, in particular, from 7 to 17. The Rf group (the fluoroalkyl group) may be  $\text{CF}_3(\text{CF}_2)_n\text{CH}_2\text{CH}_2-$  ( $n \geq 0$ ).

The fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E) may be, in particular,  $\text{Rf-OH}$  or  $\text{Rf-Si(OR}^{31})_3$ , wherein each R<sup>31</sup> is independently a C<sub>1-20</sub> alkyl group.

[0031]

The fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E) may be a silane, an alcohol, a chlorosilane, an epoxy and a phosphate ester.

[0032]

Examples of the fluorine-containing compound having functional group reactive with metal alkoxide include the followings:

- 5     2-perfluorooctylethyltriethoxysilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_3\text{CH}_2\text{CH}_2-\text{Si}(\text{OCH}_2\text{CH}_3)_3],$   
      2-perfluorodecylethyltriethoxysilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_4\text{CH}_2\text{CH}_2-\text{Si}(\text{OCH}_2\text{CH}_3)_3],$   
      2-perfluorododecylethyltriethoxysilane  
10     $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_5\text{CH}_2\text{CH}_2-\text{Si}(\text{OCH}_2\text{CH}_3)_3],$   
      2-perfluorotetradecylethyltriethoxysilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_6\text{CH}_2\text{CH}_2-\text{Si}(\text{OCH}_2\text{CH}_3)_3],$   
      2-perfluorooctylethanol  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_3\text{CH}_2\text{CH}_2\text{OH}],$   
      2-perfluorodecylethanol  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_4\text{CH}_2\text{CH}_2\text{OH}],$   
15    2-perfluorododecylethanol  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_5\text{CH}_2\text{CH}_2\text{OH}],$   
      2-perfluorotetradecylethanol  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_6\text{CH}_2\text{CH}_2\text{OH}],$   
      [0033]

- 2-perfluorooctylethyltrichlorosilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_3\text{CH}_2\text{CH}_2-\text{SiCl}_3],$   
20    2-perfluorodecylethyltrichlorosilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_4\text{CH}_2\text{CH}_2-\text{SiCl}_3],$   
      2-perfluorododecylethyltrichlorosilane  
       $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_5\text{CH}_2\text{CH}_2-\text{SiCl}_3],$   
      2-perfluorotetradecylethyltrichlorosilane  
25     $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_6\text{CH}_2\text{CH}_2-\text{SiCl}_3],$

3-perfluorooctyl-1,2-epoxypropane  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_3\text{-Gly}]$ ,  
3-perfluorodecyl-1,2-epoxypropane  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_4\text{-Gly}]$ ,  
3-perfluorododecyl-1,2-epoxypropane  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_5\text{-Gly}]$ ,  
3-perfluorotetradecyl-1,2-epoxypropane  $[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_6\text{-Gly}]$ ,

5 (Gly is a glycidyl group.)

2-perfluorooctylethylphosphate

$[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_3\text{-CH}_2\text{CH}_2\text{O}]_m\text{-PO-(OH)}_{3-m}$ ,

2-perfluorodecylethylphosphate

$[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_4\text{-CH}_2\text{CH}_2\text{O}]_m\text{-PO-(OH)}_{3-m}$ ,

10 2-perfluorododecylethylphosphate

$[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_5\text{-CH}_2\text{CH}_2\text{O}]_m\text{-PO-(OH)}_{3-m}$ , and

2-perfluorotetradecylethylphosphate

$[\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_6\text{-CH}_2\text{CH}_2\text{O}]_m\text{-PO-(OH)}_{3-m}$

( $m = 1$  to  $3$ ).

15 [0034]

The amount of the fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E) may be from 0.1 to 50 parts by weight, for example, from 1.0 to 5.0 parts by weight, based on 100 parts by weight of the metal alkoxide (A).


[0035]

The fluorine-containing monomers having carbon-carbon double bond (B-iv) and (C-ii) may be a fluorine-containing (meth)acrylate, a fluorine-containing maleate or a  
25 fluorine-containing fumarate.

The fluorine-containing (meth)acrylate has, for example,  
the following structure:

general formula (1):


[Chemical formula 7]



wherein Rf is a polyfluoroalkyl group having 6 to 16 carbon atoms  
or a perfluoropolyether group,


A is an alkylene group having 1 to 4 carbon atoms,

[Chemical formula 8]



(wherein R<sup>1</sup> is an alkyl group having 1 to 4 carbon atoms, and  
R<sup>2</sup> is an alkylene group having 1 to 4 carbon atoms.), or

[Chemical formula 9]




15 X<sup>11</sup> is an hydrogen atom or a methyl group.

[0036]


The polyfluoroalkyl group (Rf group) may be a perfluoroalkyl  
group.

Specific examples of the perfluoropolyether group are as  
20 follows.







wherein n is an integer of 3 to 30,



wherein n is an integer of 2 to 30 and m is an integer of 3 to 70,



wherein n is an integer of 2 to 40 and m is an integer of 4 to 70,






wherein n is an integer of 3 to 30.

A number-average molecular weight of the perfluoropolyether group (measured by  $^{19}\text{F}$ -NMR) is preferably in the range between 500 and 5,000.

[0037]




The fluorine-containing (meth)acrylate may be:











wherein n is from 0 to 10.


[0038]

Specific examples of the fluorine-containing (meth)acrylate are as follows:







[Chemical formula 10]



10




and



[0039]

The fluorine-containing maleate may be of the formula:

15 [Chemical formula 11]

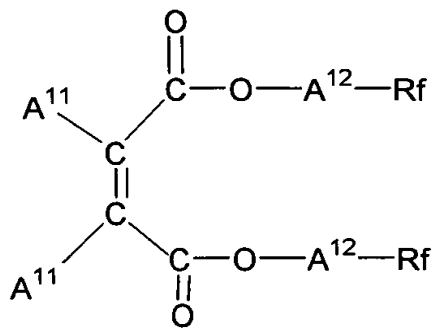

wherein Rf is a perfluoroalkyl group having 3 to 21 carbon atoms,


A<sup>11</sup> is a hydrogen atom or an alkyl group having 1 to 4 carbon atoms, and

A<sup>12</sup> is an alkylene group having 1 to 4 carbon atoms.

[0040]

5 The fluorine-containing fumarate may be of the formula:

[Chemical formula 12]

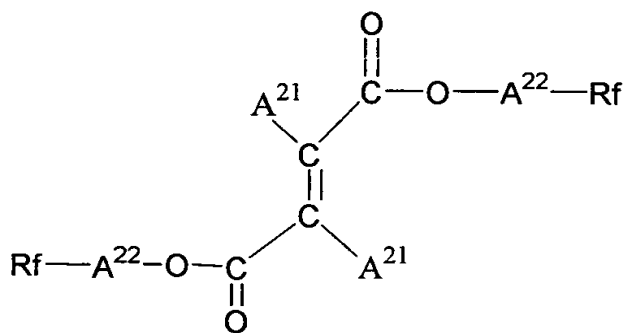

wherein Rf is a perfluoroalkyl group having 3 to 21 carbon atoms,

10 A<sup>21</sup> is a hydrogen atom or an alkyl group having 1 to 4 carbon atoms, and

A<sup>22</sup> is an alkylene group having 1 to 4 carbon atoms.

[0041]

The amount of the fluorine-containing monomers having  
 15 carbon-carbon double bond (B-iv) and (C-ii) may be from 0.1 to 50 parts by weight, for example, from 1.0 to 5.0 parts by weight, based on 100 parts by weight of the metal alkoxide (A).

[0042]

The surface treatment agent of the present invention is  
 20 a composition for an inorganic-organic hybrid material.

The inorganic-organic hybrid material is formed from an organic component and an inorganic component. The organic component is the fluorine-free (meth)acrylic acid derivative monomers (B-ii), (C-i) and (D-i), the fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E), and the fluorine-containing monomers having carbon-carbon double bond (B-iv) and (C-ii). The inorganic component is the metal alkoxide (A) and the monomer having carbon-carbon double bond and metal alkoxide group (B-i).

10 [0043]

The inorganic-organic hybrid material having a structure wherein a polymer is dispersed in a metal oxide (particularly  $\text{MO}_2$  (M is a metal atom))-containing three dimensional microstructural material (hereinafter abbreviated as "microstructural material") can be obtained from a composition for inorganic-organic hybrid material. The metal oxide (for example  $\text{MO}_2$ )-containing microstructural material is formed by hydrolysis and condensation by a sol-gel method of the metal alkoxide (that is, the metal alkoxide (A) and the monomer having carbon-carbon double bond and metal alkoxide group (B-i)). The inorganic-organic hybrid material is formed wherein the polymer (that is, the polymer (B) or (C) or (D)) is dispersed in the metal oxide-containing microstructural material. A covalent bond is formed between the metal alkoxide (A) and the polymer (B). A hydrogen bond is formed between the metal alkoxide (A)

and the polymer (C). A covalent bond is not formed between the metal alkoxide (A) and the polymer (D).

The inorganic-organic hybrid material is suitable for a surface treatment agent, particularly a treatment agent for a textile, and has excellent soil release durability and transparency and is hydrophobic.

[0044]

A coated film of the inorganic-organic hybrid material is formed on a substrate. The substrate may be a polymeric material. The substrate may be, for example, in the form of a film, a fiber and a cloth.

The coated film of the inorganic-organic hybrid material may comprise an uneven layer having the whole surface which is roughened by forming microscopic unevenness. A surface roughness of the uneven layer of the coated film may be a maximum height ( $R_{\max}$ ) of 0.001 to 100  $\mu\text{m}$ . A thickness of the coated film may be from 0.01 to 100  $\mu\text{m}$ .

[0045]

The Knoop hardness (KH) of the coated film formed from the inorganic-organic hybrid materials is at least 5. The Knoop hardness may be, for example, at least 6, in particular, at least 8. The Knoop hardness is measured by means of Terasawa type micro hardness meter (SM-2 manufactured by Taiyo Tester Co., Ltd.).

The inorganic-organic hybrid material may have a contact

angle of water of at least 100 degree.

[0046]

Components selected from the metal alkoxide (A), the monomer having carbon-carbon double bond and metal alkoxide group (B-i), the fluorine-free methacrylic acid derivative monomers (B-ii), (C-i) and (D-i) and the fluorine-containing compounds having functional group reactive with metal alkoxide (B-iii) and (E) and the fluorine-containing monomers (B-iv) and (C-ii) are hydrolyzed in an aqueous medium in the presence of a catalyst (for example, an acid or a base) to give a hydrolysed product (that is, the inorganic-organic hybrid material). The hydrolysed product is dissolved or dispersed in a medium (water or an organic solvent), then an initiator (and, if necessary, a crosslinking agent) is added to give a hybrid material/medium mixture.

[0047]

Examples of the organic solvent include alcohols (for example, methanol and ethanol), ethers (for example, benzoin methyl ether) and amides (for example, N,N-dimethylformamide). Examples of the initiator include peroxides (for example, ammonium peroxodisulfate and ammonium persulfate). Examples of the crosslinking agent include bis-acrylamides (for example, N,N-methylene-bis-acrylamide). An emulsifier, a pH adjuster and the like may be employed in order to disperse the inorganic-organic hybrid material in water.

[0048]

Any of the following emulsifiers may be employed;  
for example, anionic surface active agents such as an alkyl  
sulfate ester salt, an alkyl aryl sulfate ester salt, an alkyl  
5 phosphate ester salt and a fatty acid salt;  
cationic surface active agents such as a alkylamine salt and  
a quaternary alkyl amine salt;  
nonionic surface active agents such as a polyoxyethylene alkyl  
ether, a polyoxyethylene alkyl aryl ether and a block-type  
10 polyether; and  
amphoteric surface active agents such as a carboxylic acid-type  
agent (for example, amino acid-type, betaine-type, etc) and a  
sulfonic acid-type agent. These emulsifiers may be employed  
alone or in combination of at least two.

15 [0049]

In the case that the copolymer contains an acidic group  
such as a carboxyl group or a carboxylic acid, it is preferable  
to adjust pH by adding at least one basic compound after  
condensation polymerization of the metal alkoxide (A) and the  
20 monomer having carbon-carbon double bond and metal alkoxide group  
(B-i). In the case that the copolymer has a basic group such  
as an amino group or an amine imide group in the copolymer, it  
is preferable to adjust pH by adding at least one acidic compound  
after condensation polymerization of the metal alkoxide (A) and  
25 the monomer having carbon-carbon double bond and metal alkoxide

group (B-i). In the case that the copolymer has the acidic group and the basic group, the hydrophilic property of the resultant copolymer is enhanced, and the dispersibility of the polymer can be improved, by adjusting pH by way of adding at least one  
5 acidic compound or at least one basic compound depending on the content of these acidic and basic groups, after condensation polymerization of the metal alkoxide (A) and the monomer having carbon-carbon double bond and metal alkoxide group (B-i).

[0050]

10           Examples of the above-mentioned basic compound include amines such as ammonia, methylamine, dimethylamine, trimethylamine, ethyl amine, diethylamine, triethylamine, ethanolamine, diethanolamine, dimethyl amino ethanol; and alkali metal hydroxides such as potassium hydroxide and sodium  
15 hydroxide. Examples of the above-mentioned acidic compound include inorganic acids such as hydrochloric acid, phosphoric acid, sulphuric acid and nitric acid; and organic acids such as formic acid, acetic acid, propionic acid, lactic acid, oxalic acid, citric acid, adipic acid, (meth)acrylic acid, maleic acid,  
20 fumaric acid and itaconic acid. The pH value adjusted may be usually from 6 to 10, more preferably from 7 to 8.

          Although the aqueous medium in the aqueous dispersion essentially comprises water, in some cases an organic solvent such as alcohols may be contained up to approximately several  
25 percentage by weight.





[0051]

In the present invention, it is preferable to employ the following metal chelate compound (F) and  $\beta$ -keto compound (G).

[0052]

5        The metal chelate compound (F) comprises at least one metal chelate compound selected from the group consisting of the compounds represented by the following general formulas:



wherein  $\text{R}^{51}$  and  $\text{R}^{52}$  are, the same or different, an alkyl group having 1 to 6 carbon atoms, and  $\text{R}^{53}$  is an alkyl group having 1 to 5 carbon atoms or an alkoxyl group having 1 to 16 carbon atoms,

15        and/or partially hydrolysed compound thereof.

It is believed that the metal chelate compound (F) performs a function of accelerating a condensation reaction during the condensation polymerization of the metal alkoxide (A) and the monomer having carbon-carbon double bond and metal alkoxide group  
20        (B-i).

[0053]

In each of the formulas representing the metal chelate compound (F), the alkyl groups  $\text{R}^{51}$  and  $\text{R}^{52}$  having 1 to 6 carbon atoms may be a linear or branched alkyl group such as a methyl  
25        group, an ethyl group, an n-propyl group, an isopropyl group,

an n-butyl group, an isobutyl group, a sec-butyl group, a t-butyl group, an n-pentyl group and an n-hexyl group. For the  $R^{53}$  group, the alkyl group having 1 to 5 carbon atoms may be a linear or branched alkyl group such as a methyl group, an ethyl group, an n-propyl group, an isopropyl group, an n-butyl group, an isobutyl group, a sec-butyl group, a t-butyl group, an n-pentyl group, and the alkoxyl group having 1 to 16 carbon atoms may be a methoxy group, an ethoxy group, an n-propoxy group, an isopropoxy group, a n-butoxy group, an isobutoxy group, a sec-butoxy group, a t-butoxy group, a lauryl group and a stearyl group. In the case that the compound in each of the above-mentioned formulas has at least two of  $R^{51}$ ,  $R^{52}$  and/or  $R^{53}$  groups, they may be the same or may be different from each other.

[0054]

Examples of the metal chelate compound (F) include zirconium chelate compounds such as zirconium tri-n-butoxy ethyl acetoacetate, zirconium di-n-butoxy bis(ethyl acetoacetate), zirconium n-butoxy tris(ethyl acetoacetate), zirconium tetrakis(n-propyl acetoacetate), zirconium tetrakis(acetyl acetoacetate) and zirconium tetrakis(ethyl acetoacetate); titanium chelate compounds such as titanium diisopropoxy bis(ethyl acetoacetate), titanium diisopropoxy bis(acetyl acetoacetate) and titanium diisopropoxy bis(acetyl acetate); aluminum chelate compounds such as aluminum diisopropoxy ethyl acetoacetate, aluminum diisopropoxy acetyl acetate, aluminum

isoprpoxy bis(ethyl acetoacetate), aluminum isoprpoxy bis(acetyl acetate), aluminum tris(acetyl acetate), aluminum tris(ethyl acetoacetate) and aluminum monoacetylacetate bis(ethyl acetoacetate).

5 [0055]

Among the above-mentioned metal chelate compounds (F), zirconium tri-n-butoxy ethyl acetoacetate, titanium diisopropoxy bis(acetyl acetate), aluminum diisopropoxy ethyl acetoacetate and aluminum tris(ethyl acetoacetate) are  
10 preferable. In the present invention, the metal chelate compound (F) may be employed alone or in combination of at least two. The blending ratio of the metal chelate compound (F) is usually from 0.01 to 50 parts by weight, preferably from 0.1 to 50 parts by weight, more preferably from 0.5 to 10 parts by  
15 weight, based on 100 parts by weight of the metal alkoxide (A). Soil releasability is further improved by employing the metal chelate compound (F) by using the above-mentioned blending ratio.  
[0056]

The  $\beta$ -keto compound (G) comprises at least one compound  
20 selected from  $\beta$ -diketones and/or  $\beta$ -keto esters represented by the following general formula, and provides a function of storage stabilizer for the surface treatment agent of the present invention;



25 wherein  $R^{62}$  and  $R^{63}$  are the same as  $R^{52}$  and  $R^{53}$  respectively in

the above-mentioned each general formula representing the metal chelate compound (F).

It is believed that the  $\beta$ -keto compound (G) coordinates with the metal atom in the metal chelate compound (F) when an aqueous dispersion is prepared and it suitably prevents the acceleration function of the metal chelate compound for the condensation reaction of the metal alkoxide (A) and the monomer having carbon-carbon double bond and metal alkoxide group (B-i) so that it further stabilizes the resultant composition during storage.

[0057]

Examples of the  $\beta$ -keto compound (G) include acetylacetone, methyl acetoacetate, ethyl acetoacetate, n-propyl acetoacetate, isopropyl acetoacetate, n-butyl acetoacetate, isobutyl acetoacetate, sec-butyl acetoacetate, t-butyl acetoacetate, 2,4-hexanedione, 2,4-heptanedione, 3,5-heptanedione, 2,4-octanedione, 3,5-octanedione, 2,4-nonanedione, 3,5-nonanedione and 5-methyl-2,4-hexanedione. Among above-mentioned  $\beta$ -keto compounds (G), acetylacetone and ethyl acetoacetate are particularly preferable. In the present invention, the  $\beta$ -keto compound (G) may be employed alone or in combination of at least two. A blending ratio of  $\beta$ -keto compound (G) is at least 2 moles, preferably from 3 to 20 moles, more preferably from 4 to 15 moles, based on 1 mole of the metal chelate compound (F).

[0058]

The aqueous dispersion of the surface treatment agent of the present invention may comprise the metal chelate compound (F) and the  $\beta$ -keto compound (G) and, if required, may comprise other additives. At least one colloidal silica and/or colloidal alumina (hereinafter collectively referred to as "colloidal additive (H)") may be added in order to improve the soil releasability of fiber. The above-mentioned colloidal silica is a dispersion liquid wherein a high-purity silicic anhydride is dispersed in water and/or a hydrophilic organic solvent. An average particle diameter of the colloidal silica is usually from 5 nm to 100 nm and preferably from 10 nm to 50 nm, and solid concentration of the colloidal silica is usually approximately from 10 to 40 % by weight.

[0059]

Examples of the colloidal silica include Snowtex, methanol silica sol, isopropanol silica sol (manufactured by Nissan Chemical Industries, Ltd.). The above-mentioned colloidal alumina is an alumina sol in aqueous dispersing medium having pH of from 2.5 to 6 or an alumina sol in a hydrophilic organic solvent dispersing medium. The average particle diameter of the colloidal alumina is usually from 5 to 200 nm, preferably from 10 to 100 nm, and the solid concentration is usually approximately from 5 to 25 % by weight. As alumina, for example, synthetic alumina, boehmite and pseudo boehmite may be employed.

Colloidal alumina of this type is commercially available with trade names such as ALUMINA SOL-100, ALUMINA SOL-200 and ALUMINA SOL-520 (manufactured by Nissan Chemical Industries, Ltd.). In the present invention, the colloidal additive (H) may be employed alone or in combination of at least two. A blending ratio of colloidal additive (H) is usually at most 30 parts by weight, preferably at most 20 parts by weight, as expressed in the solid content, based on 100 parts by weight of the copolymer.

[0060]

After the hybrid material/medium mixture is applied on a surface of a substrate, a curing process may be applied. The curing may be performed by means of heat (for example, application of heat of from 100 to 150 °C) etc.

[0061]

An inorganic-organic hybrid material of the present invention (the surface treatment agent) may be applied to a substrate (that is, a substrate to be treated) by a conventionally known method. The surface treatment agent is usually diluted with an organic solvent or water and deposited on the surface of the substrate to be treated (for example, a carpet) by known methods such as a dipping application, a spray coating application and a foam coating application. If necessary, a carpet base fabric or a carpet yarn may be treated with steam before the application of the treatment agent.

[0062]

Additives such as other water repellents and oil repellents, moth proofing agents, softening agents, antimicrobial agents, flame retardants, antistatic additives, coating fixing agents and crease resistant agents may be added to the surface treatment agent of the present invention. In the case of the dipping application, a concentration of the inorganic-organic hybrid material in a dipping liquid may be from 0.05 to 30 % by weight. In the case of the spray application, the concentration of the inorganic-organic hybrid material in the treatment liquid may be from 0.1 to 5 % by weight.

[0063]

The substrate to be treated with the surface treatment agent of the present invention may be a textile. It is especially preferable that the substrate is a carpet. Various examples may be mentioned as the textile. Examples of the textile include vegetable fibers and animal fibers such as cotton, hemp, sheep wool and silk, synthetic fibers such as polyamide, polyester, polyvinyl alcohol, polyacrylonitrile, polyvinyl chloride and polypropylene, semi-synthetic fibers such as rayon and acetate, inorganic fibers such as fiberglass, carbon fiber and asbestos fiber or mixture of these above-mentioned fibers. Superior resistance against a cleaning solution and mechanical brushing of the present treatment agent enables the treatment agent of the present invention preferably to be applied for carpets of nylon and/or polypropylene.

[0064]

The textile may be in any form such as a fiber, a yarn or a fabric. In the case that the carpet is treated with the surface treatment agent of the present invention, the carpet  
5 may be manufactured from fibers or yarns after the fibers or the yarns were treated with the surface treatment agent. Alternatively, an already prepared carpet may be treated with the surface treatment agent.

Examples of the substrate to be treated with the surface  
10 treatment agent of the present invention include glass, paper, wood, leather, fur, asbestos, brick, cement, metal, building stone, concrete, oxide, ceramics, plastics, painted surface, plaster, a building material, rubber, light guide and contact lens, in addition to the textile.

15 [0065]

Examples of the substrate to be treated with the surface treatment agent of the present invention include a member for image formation instrument. Examples of the image formation instrument include a copier, a printer, a facsimile and combined  
20 machine thereof. A shape of the member may be various shape such as a roll, a blade and a belt. Non-limiting specific examples of the member include a photo conductor, a charged roll, a charged brush, a charged blade, a developing roll, an intermediate transfer roll, an intermediate transfer belt, a  
25 paper transfer roll, a transfer fixation belt, a fixation roll,



a fixation belt, a pressurizing roll, a pressurizing belt, a paper feed roll, a paper feed belt, a separation nail, a cleaning blade and cleaning roll. The member is not limited to a member for an electronic photo-type image formation instrument using a powder toner, and the surface treatment agent of the present invention can be used for an image formation instrument member for various methods such as a toner jet method, a liquid toner method, an ink jet method, a sublimation method and a thermal transfer method.

10 [0066]

When the carpet fibers are treated with the surface treatment agent of the present invention, a numerical value of soil release rate of at least 30% after cleaning in a soil release test, which is shown in the following equation, can be achieved:

15 
$$\text{Soil release rate (\%)} = 100 \times (\Delta E_N - \Delta E_{Tn}) / \Delta E_N$$

$\Delta E_N$ : Color difference of untreated carpet after soil release test, and

$\Delta E_{Tn}$ : Color difference of carpet treated with a surface treatment agent after soil release test (n: number of cleaning (n is an integer of 1 to 20)).

20

The soil release test is conducted according to AATCC-TM-123-1995 and the cleaning is conducted according to a method of AATCC-TM-138-1992.

[0067]

25 The color difference  $\Delta E$  after the soil release test is

represented by the equation:

$$\Delta E = [(L_1^* - L_2^*)^2 + (a_1^* - a_2^*)^2 + (b_1^* - b_2^*)^2]^{0.5}$$

wherein  $L_1^*$ ,  $a_1^*$  and  $b_1^*$  are a substance color calculated in a  $L^*a^*b^*$  system after soil release test, and

5  $L_2^*$ ,  $a_2^*$  and  $b_2^*$  are a substance color calculated in a  $L^*a^*b^*$  system before soil release test.

Soil release rate of at least 30%, for example 50% can be maintained at number of cleaning of 3, preferably 5, more preferably 10, further preferably 15, particularly 20.

10 [0068]

The color of the carpet treated with the surface treatment agent has L which may be from 40 to 80, preferably from 40 to 60, a which may be from +0.1 to -0.8, preferably from -0.1 to -0.6, and b which may be from -13 to -25, preferably from  
15 -17 to -21.

When a treatment cycle of contamination, cleaning and re-contamination is applied to the carpet, a soil release rate of preferably at least 20%, more preferably at least 30% can be maintained at the re-contamination.

20 [0069]

When the surface treatment agent is used for the carpet fibers, a numerical value of a residual rate of the surface treatment agent shown in the following equation, which is at least 10%, in a surface analysis of a coating film by an IR-ATR  
25 method can be achieved:

Residual rate (%) =  $100 \times (A_2/A_1)$

A<sub>1</sub>: IR intensity ratio before cleaning

A<sub>2</sub>: IR intensity ratio after cleaning.

[0070]

5 The IR intensity ratio can be defined as

IR intensity ratio = (absorption peak area of Si-O-Si group)  
/ (absorption peak area of amide group of nylon)

The absorption peak area of Si-O-Si group is a peak area  
calculated at integration range of 1090 to 981 cm<sup>-1</sup>. The  
10 absorption peak area of amide group of nylon is a peak area  
calculated at integration range of 1673 to 1583 cm<sup>-1</sup>.

[0071]

A numerical value of residual rate of the coating film after  
cleaning may be at least 10%, for example at least 10%,  
15 particularly at least 30%.

[0072]

#### EXAMPLES

The present invention will be illustrated hereinafter by  
20 showing Examples and Comparative Examples, but these examples  
are not intended to be any limitation of the present invention.

The term "part" represents part by weight, unless  
specified.

The examinations were performed as follows.

25 [0073]

Knoop hardness

A coated film of an inorganic-organic hybrid material (thickness: 1  $\mu$ m) is formed on a glass plate. A Knoop hardness of the coated film is measured by Terasawa type micro hardness meter (SM-2 manufactured by Taiyo Tester Co., Ltd.).

[0074]

Water repellency

A droplet of isopropyl alcohol/water mixture liquid having the composition shown in Table I is gently placed on a surface of a carpet fabric. Water repellency is represented by a maximum content of isopropyl alcohol in the mixture liquid wherein a droplet shape is kept after three minutes.

[0075]

15 [Table 1]

Table I

Mixture composition (volume ratio %)	
Isopropyl alcohol	Water
60	40
50	50
40	60
30	70
20	80
10	90
0	100

[0076]

Oil repellency

20 Oil repellency is evaluated by means of AATCC-TM-118-1966.

Several droplets (diameter 4 mm) of a test liquid shown in Table II are placed on 2 points of a sample cloth. After 30 seconds, the penetration state of the droplets is observed. The highest number of the oil repellency given by the examination liquid that does not exhibit the penetration is expressed as the oil repellency.

[0077]

[Table 2]

10 Table II

Oil repellency	Test liquid	Surface tension (dynes/cm at 25 °C)
8	n-Heptane	20.0
7	n-Octane	21.8
6	n-Decane	23.5
5	n-Dodecane	25.0
4	n-Tetradecane	26.7
3	n-Hexadecane	27.3
2	Mixture liquid of 35 parts of hexadecane and 65 parts of nujol	29.6
1	Nujol	31.2
0	Inferior to 1	---

[0078]

Soil releasability

Soil releasability of a carpet treated with a surface treatment agent is evaluated with the following method according to AATCC-TM-123-1995.

After the carpet fabric is cut into 5.5cm × 8cm pieces and kept to stand for 4 hours in a thermohygrostat (21 °C, 65% RH), the fabric is stained with dry soil which has the following composition and then sufficiently dried. Specifically, five  
5 pieces of the treated carpet are placed under the state that a back surface of each piece is attached to an internal of a ball mill so that the treated surface of the piece is upside. 0.031 g of dry soil (dry soil was totally 6.82 g for five pieces) per surface area 1cm<sup>2</sup> of carpet piece and 50 ceramic balls  
10 (diameter of 2.0 cm) are placed in the ball mill. The ball mill is rotated with 80 rpm for 7 minutes and 30 seconds, and the dry soil is adhered to the carpet piece surface uniformly.

The ball mill employed here is cylindrical, and has an inside bottom diameter of 12.0 cm and a height of 9.5 cm. Then  
15 excessive dry soil adhered to the surface is removed thoroughly with a home vacuum cleaner. A color difference ( $\Delta E$ ) of the carpet surface is measured using a color difference meter (MINOLTA CR-310).

[0079]

20 The composition of the dry soil is as follows.

[Table 3]

Table III

Components	Weight ratio (%)
Peat moss	38.4
Cement	18
Kaolin	18
Silica	18
Carbon black	1.15
Ferric oxide (III)	0.30
Nujol	6.25

Values of L, a and b are L: from 25 to 31, a: from 2.3 to 2.6,  
b: from 4. 2 to 4. 8.

5

[0080]

Cleaning method

The carpet fabric treated with the surface treatment agent is cleaned according to a method of AATCC-TM-138-1992. The details of the cleaning are as follows.

A surface of a carpet piece cut into 11cm × 11cm square is rinsed with running water at 50 °C for one minute and squeezed with mangles (a pressure of 5 mg/cm<sup>2</sup>). The carpet piece is fixed on a sample pedestal of a cleaning testing machine (STAIN & CLEANING TESTER manufactured by Yoshida Seiki Seisakusyo Company) described in JIS L1023-1992 so that a rotating brush rubs the carpet pile. One percent aqueous solution of sodium lauryl sulfate (SLS) (adjusted at pH 8 with NaOH aqueous solution)

(5.6 mL) adjusted at 50 °C is poured onto a carpet piece with a pipet. The rotating brush and the sample pedestal are rotated and the carpet piece is cleaned. The operation wherein the sample pedestal rotates in regular direction five revolutions, in  
5 reverse direction five revolutions, in regular direction five revolutions, and then in reverse direction five revolutions (during the rotation of the sample pedestal, the rubbing by the rotating brush is continued) is defined as one set of cleaning.  
[0081]

10 In the cleaning test, the cleaning operation is repeated five sets without adding 1% aqueous SLS solution.

The sample pedestal rotates at 20 rpm, the brush rotates at 240 rpm, and vacuum and water spray nozzle of the cleaning testing machine are not employed.

15 The test carpet piece is thoroughly rinsed with running water at 50 °C, squeezed with mangles and dried in a hot-air drier at 105 °C for 30 minutes.

[0082]

20 Fluorine residual rate

A fluorine residual rate of a carpet treated with a surface treatment agent is determined by the following method. Two hundred mg of carpet pieces before and after cleaning are collected and processed by an oxygen flask combustion method.  
25 F<sup>-</sup> (a fluorine ion) is absorbed in water which is an absorption



liquid. Then the amount of  $F^-$  (fluorine ion) is calculated by a fluorine ion electrode method to determine a fluorine residual rate.

5 [0083]

Residual rate of surface treatment agent

A residual rate in a nylon film treated with a surface treatment agent is determined by the following method. The nylon films before and after cleaning are cut into pieces having a size of 5.5 cm x 1.5 cm. The pieces are surface-analyzed by an IR-ATR method (FT-IR 1760X manufactured by Perkin Elmer Corp.) to determine a residual rate

[0084]

15 Synthesis Example 1

In a 100 mL flask equipped with a stirrer, a thermometer and a dropping funnel, 1.5 parts of heptadecafluoro-1,1,2,2-tetrahydrodecyl triethoxy silane [ $CF_3(CF_2)_7CH_2CH_2-Si(OCH_2CH_3)_3$ ] (a fluorine-containing compound) (manufactured by Shin-Etsu Chemical Co., Ltd.) and 5 parts of methyl methacrylate (MMA) were added into 15 parts of 3-methacryloxypropyl trimethoxy silane [ $CH_2=CH(CH_3)-(C=O)-O-(CH_2)_3Si(OCH_3)_3$ ] (TMSM) (manufactured by Shin-Etsu Chemical Co., Ltd.) and 15 parts of tetraethoxysilane

25 [ $Si(OCH_2CH_3)_4$ ] (TEOS) (manufactured by Shin-Etsu Chemical Co.,

Ltd.). The mixture was stirred at room temperature for one hour to perform hydrolysis and condensation polymerization reactions. Resultant compound was named as "Product 1".

[0085]

5     Synthesis Example 2

The same procedure as in Synthesis Example 1 was followed to give Product 2 except that 1.5 parts of perfluorooctylethyl acrylate was used instead of 1.5 parts of heptadecafluoro-1,1,2,2-tetrahydrodecyl triethoxy silane.

10    [0086]

Synthesis Example 3

In a 100 mL flask equipped with a stirrer, a thermometer and a dropping funnel, 1.5 parts of heptadecafluoro-1,1,2,2-tetrahydrodecyl triethoxy silane (a  
15    fluorine-containing compound) (manufactured by Shin-Etsu Chemical Co., Ltd.) and 5 parts of polymethyl methacrylate (PMMA) were added into 30 parts of tetraethoxysilane (TEOS) (manufactured by Shin-Etsu Chemical Co., Ltd.). The mixture was stirred at room temperature for one hour to perform  
20    hydrolysis and condensation polymerization reactions. Resultant compound was named as "Product 3".

[0087]

Synthesis Example 4

Into a 250 mL flask equipped with a stirrer,  
25    25 parts of a compound of the formula:

$\text{CF}_3\text{CF}_2(\text{CF}_2\text{CF}_2)_n\text{CH}_2\text{CH}_2\text{OCOC}(\text{CH}_3)=\text{CH}_2$  (a mixture of compounds wherein  $n$  is 3, 4 and 5 in a weight ratio of 5:3:1),

10 parts of  $\text{CH}_2=\text{C}(\text{CH}_3)\text{COO}(\text{CH}_2\text{CH}_2\text{O})_9\text{CH}_3$  and 4 parts of  $\text{CH}_2=\text{C}(\text{CH}_3)\text{COO}(\text{CH}_2\text{CH}(\text{CH}_3)\text{O})_{12}\text{H}$  which are polyalkyleneglycol methacrylate, 3 parts of 3-chloro-2-hydroxypropyl methacrylate:  $\text{CH}_2=\text{C}(\text{CH}_3)\text{COOCH}_2\text{CH}(\text{OH})\text{CH}_2\text{Cl}$ , 1 part of glycerol monomethacrylate:  $\text{CH}_2=\text{C}(\text{CH}_3)\text{COOCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OH}$ , 30 parts of tetraethoxysilane and 120 parts of ethanol are charged and 9 parts of 0.5 N hydrochloric acid was added with stirring. The mixture was stirred at room temperature for 24 hours to perform hydrolysis and condensation polymerization reactions. Resultant compound was named as "Product 4".

[0088]

#### Comparative Synthesis Example 1

15 The same procedure as in Synthesis Example 1 was followed to give Product 5 except that 5 parts of methacrylic acid (MMA) was used instead of 5 parts of methyl methacrylate.

#### Comparative Synthesis Example 2

20 The same procedure as in Synthesis Example 1 was followed to give Product 6 except that 1.5 parts of  $n$ -decyl triethoxy silane (a long chain alkyl compound) was used instead of 1.5 parts of heptafluoro-1,1,2,2-tetrahydrodecyltriethoxy silane (a fluorine-containing compound).

[0089]

Comparative Synthesis Example 3

The same procedure as in Synthesis Example 1 was followed to give Product 7 except that 30 parts of methyl methacrylate was used instead of 15 parts of 3-methacryloxypropyl trimethoxy silane and 15 parts of tetraethoxysilane.

Comparative Synthesis Example 4

The same procedure as in Synthesis Example 4 was followed to give Product 8 except that 30 parts of polyalkyleneglycol methacrylate was used instead of 30 parts of tetraethoxysilane.

[0090]

Preparative Example 1

## Polymerization of Product 1 (Solution A)

Product 1 provided by Synthesis Example 1 and N,N-dimethylformamide (DMF) were mixed in the amounts shown in Table A to give a mixture liquid.

After dissolved by heat, this mixture liquid was introduced into 1 liter 4-necked flask equipped with a reflux condenser, a nitrogen inlet pipe, a thermometer and a stirring device, and dissolved oxygen was removed by nitrogen replacement. Then ammonium persulfate (APS) as an initiator was introduced in the amount shown in Table A. While stirring, a copolymerization reaction was performed at 60 °C for 8 hours to give a copolymer (Solution A). A glass transition point of the copolymer was 110 °C.

[0091]

Preparative Example 2

## Polymerization of Product 2 (Solution B)

The same procedure as in Preparative Example 1 was followed to give a copolymer (Solution B) except that Product 2 was used instead of Product 1 used in the Preparative Example 1. A glass transition point of the copolymer was 108 °C.

[0092]

Preparative Example 3

## Polymerization of Product 3 (Solution C)

Product 3 provided by Synthesis Example 3 and N,N-dimethylformamide (DMF) were mixed in the amounts shown in Table A to give a mixture liquid (Solution C). A glass transition point of the compound (Product 3) was 110 °C.

[0093]

15 Preparative Example 4

## Emulsion polymerization of Product 1 (Emulsion A)

Product 1 provided by Synthesis Example 1, pure water, n-lauryl mercaptan (LSH), polyoxyethylenealkylphenylether ammonium sulfate (HITENOL N-17, an anionic emulsifier), polyoxyethylenealkylphenyl ether (NONION HS-220, a nonionic emulsifier), polyoxyethylene sorbitan monolaurate (NONION LT-221, a nonionic emulsifier), dipropyleneglycol monomethyl ether (DPM) were mixed in amounts shown in Table A to give a mixture liquid.

25 [0094]

After dissolved by heat, the mixture liquid was emulsified with an ultrasonic emulsifier to give an emulsion. The emulsion was introduced into a 1 liter 4-necked flask equipped with a reflux condenser, a nitrogen inlet pipe, a thermometer and a stirring device, and dissolved oxygen was removed by nitrogen replacement. Then ammonium persulfate as initiator (APS) was introduced in the amount shown in Table A. While stirring the copolymerization reaction was performed at 60 °C for 8 hours to give a copolymer (Emulsion A). A glass transition point of the copolymer was 109 °C.

[0095]

#### Preparative Example 5

Emulsion polymerization of Product 2 (Emulsion B)

The same procedure as in Preparative Example 4 was followed to give a copolymer (Emulsion B) except that Product 2 was used instead of Product 1 used in the Preparative Example 4. A glass transition point of the copolymer was 108 °C.

[0096]

#### Preparative Example 6

The same procedure as in Preparative Example 1 was followed to give a copolymer (Solution D) except that Product 4 and isopropyl alcohol (IPA) were used instead of Product 1 and N,N-dimethylformamide (DMF) used in Preparative Example 1.

[0097]

Comparative Preparative Example 1

## Polymerization of Product 5 (Solution D)

The same procedure as in Preparative Example 1 was followed to give a copolymer (Solution E) except that Product 5 was used instead of Product 1 used in the Preparative Example 1.

Comparative Preparative Example 2

## Polymerization of Product 6 (Solution E)

The same procedure as in Preparative Example 1 was followed to give a copolymer (Solution F) except that Product 6 was used instead of Product 1 used in the Preparative Example 1.

[0098]

Comparative Preparative Example 3

## Emulsion polymerization of Product 5 (Emulsion C)

The same procedure as in Preparative Example 4 was followed to give a copolymer (Emulsion C) except that Product 5 was used instead of Product 1 used in the Preparative Example 4.

Comparative Preparative Example 4

## Emulsion polymerization of Product 6 (Emulsion D)

The same procedure as in Preparative Example 4 was followed to give a copolymer (Emulsion D) except that Product 6 was used instead of Product 1 used in the Preparative Example 4.

[0099]

Comparative Preparative Example 5

The same procedure as in Preparative Example 1 was followed to give a copolymer (Solution G) except that Product 7 was used

instead of Product 1 used in the Preparative Example 1.

[0100]

Comparative Preparative Example 6

5       The same procedure as in Preparative Example 1 was followed  
to give a copolymer (Solution H) except that Product 8 was used  
instead of Product 1 used in the Preparative Example 1.

[0101]



[Table 4]

Table A

	Preparative Example No.						Comparative Preparative Example No.					
	1	2	3	4	5	6	1	2	3	4	5	6
DPM	-	-	-	30	30	-	-	-	30	30	-	-
Pure water	-	-	-	401.3	401.3	-	-	-	401.3	401.3	-	-
LSH	-	-	-	3	3	-	-	-	3	3	-	-
N-17	-	-	-	4.5	4.5	-	-	-	4.5	4.5	-	-
HS-220	-	-	-	6	6	-	-	-	6	6	-	-
IT-221	-	-	-	4.5	4.5	-	-	-	4.5	4.5	-	-
APS	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
Product 1	90	-	-	90	-	-	-	-	-	-	-	-
Product 2	-	90	-	-	90	-	-	-	-	-	-	-
Product 3	-	-	90	-	-	-	-	-	-	-	-	-
Product 4	-	-	-	-	-	90	-	-	-	-	-	-
Product 5	-	-	-	-	-	-	90	-	90	-	-	-
Product 6	-	-	-	-	-	-	-	90	-	90	-	-
Product 7	-	-	-	-	-	-	-	-	-	-	90	-
Product 8	-	-	-	-	-	-	-	-	-	-	-	90
DMF	450	450	450	-	-	-	450	450	-	-	450	450
IPA	-	-	-	-	-	450	-	-	-	-	-	-

[0102]

Example 1

Solution A prepared in Preparative Example 1 was diluted with N,N-dimethylformamide (DMF) to give a liquid having a solid content of 3 % by weight.

The liquid obtained above was sprayed onto a nylon pile carpet fabric (a blue unbacked product) to give a fluorine concentration of 400 ppm, and then the fabric was heated at 130 °C for 10 minutes. Soil releasability, water repellency, oil repellency and adhesion ratio of a coated film were evaluated before and after cleaning. On the other hand, Knoop hardness of the coated film formed from the liquid was measured.

Results are shown in Table C.

[0103]

15 Example 2

Solution B prepared in Preparative Example 2 was diluted with N,N-dimethylformamide (DMF) to give a liquid having a solid content of 3 % by weight. This liquid was evaluated as in Example 1.

20 Results are shown in Table C.

[0104]

Example 3

Solution C prepared in Preparative Example 3 was diluted with N,N-dimethylformamide (DMF) to give a liquid having a solid content of 3 % by weight. This liquid was evaluated as in

## Example 1.

Results are shown in Table C.

[0105]

Example 4

5           Emulsion A prepared in Preparative Example 4 was diluted with pure water to give a liquid having a solid content of 3 % by weight.

          The liquid obtained above was sprayed onto a nylon pile carpet fabric (a blue unbacked product) to give a fluorine  
10       concentration of 400 ppm, and then the fabric was heated at 130 °C for 10 minutes. Soil releasability, water repellency, oil repellency and adhesion ratio of a coated film were evaluated before and after cleaning. On the other hand, Knoop hardness of the coated film formed from the liquid was measured.

15           Results are shown in Table C.

[0106]

Example 5

          Emulsion B prepared in Preparative Example 5 was diluted with pure water to give a liquid having a solid content of 3 %  
20       by weight. This liquid was evaluated as in Example 4.

Results are shown in Table C.

[0107]

Example 6

          Solution D prepared in Preparative Example 6 was diluted  
25       with ethanol to give a liquid having a solid content of 3 % by

weight. This liquid was evaluated as in Example 1.

Results are shown in Table C.

[0108]

Comparative Examples 1 and 2

5        Each of solutions prepared in Comparative Preparative Examples 1 and 2 was diluted with N,N-dimethylformamide (DMF) to give a liquid having a solid content of 3 % by weight. These liquids were evaluated as in Example 1.

Results are shown in Table C.

10      [0109]

Comparative Examples 3 and 4

Each of emulsions prepared in Comparative Preparative Examples 3 and 4 was diluted with pure water to give a liquid having a solid content of 3 % by weight. These liquids were  
15      evaluated as in Example 4.

Results are shown in Table C.

[0110]

Comparative Examples 5 and 6

Emulsions prepared in Comparative Preparative Examples  
20      5 and 6 was diluted with DMF and IPA, respectively, to give liquids having a solid content of 3 % by weight. These liquids were evaluated as in Example 1.

Results are shown in Table C.

[0111]

[Table 5]

Table B

		Example No.						Comparative Example No.					
		1	2	3	4	5	6	1	2	3	4	5	6
Inorganic component	TMSM	0	0	-	0	0	-	0	0	0	0	-	-
	TEOS	0	0	0	0	0	0	0	0	0	0	-	-
Organic component	MMA	0	0	-	0	0	-	-	0	-	0	0	-
	PMAA	-	-	0	-	-	-	-	-	-	-	-	-
	MAA	-	-	-	-	-	-	0	-	0	-	-	-
	Fluorine-containing compound	0	0	0	0	0	0	0	-	0	-	0	0
	Long chain alkyl compound	-	-	-	-	-	-	-	0	-	0	-	-
	Polyalkylene glycol (meth)acrylate	-	-	-	-	-	0	-	-	-	-	-	0
	3-Chloro-2-hydroxypropyl methacrylate	-	-	-	-	-	0	-	-	-	-	-	0
	Glycerol monomethacrylate	-	-	-	-	-	0	-	-	-	-	-	0
Emulsifier		-	-	-	0	0	-	-	-	0	0	-	-

[0112]

[Table 6]

Table C

		Example No.						Comparative Example No.					
		1	2	3	4	5	6	1	2	3	4	5	6
Before cleaning	Water repellency	50	50	50	50	50	50	30	0	30	0	50	50
	Oil repellency	3	3	3	3	3	4	2	0	2	0	3	5
	Soil release rate (%)	77	77	77	75	75	70	37	20	37	20	60	15
After cleaning (cleaned five times)	Water repellency	50	50	50	50	50	50	0	0	0	0	50	20
	Oil repellency	3	3	3	3	3	4	0	0	0	0	3	0
	Soil release rate (%)	74	74	74	72	72	70	14	0	14	0	30	5
Fluorine residual rate (%)		95	95	95	92	92	90	5	-	5	-	90	50
Knoop hardness		30	30	30	28	28	25	10	30	10	29	5	5
Adhesion ratio of coated film (%)		95	95	95	90	90	90	20	95	10	90	90	50

[0113]

ADVANTAGEOUS EFFECTS OF THE INVENTION

The present invention provides a surface treatment agent comprising an inorganic-organic hybrid material which imparts  
5 a durability maintaining sufficient water- and oil-repellency, residence of coated film and soil releasability, before and after cleaning.

## ABSTRACT

[Document Name] ABSTRACT OF DISCLOSURE

[Abstract]

5       [Problems] To provide a treatment agent which imparts durability maintaining sufficient water- and oil-repellency and soil releasability before and after cleaning.

10       [Means] A surface treatment agent, when a fiber is treated with the surface treatment agent, the treated fiber has (1) a numerical value, after cleaning, of soil release rate is at least 30%, (2) a numerical value of a residual rate, after cleaning, of the surface treatment agent shown is at least 10%, and (3) a Knoop hardness (KH) of the surface treatment agent is at least 5.

15       A surface treatment agent containing; (A) a metal alkoxide, and (B) a polymer comprising (B-i) a monomer having a carbon-carbon double bond and a metal alkoxide group, (B-ii) a fluorine-free (meth)acrylic acid derivative monomer, and (B-iii) a fluorine-containing compound having a functional group  
20       reactive with the metal alkoxide, or (B-iv) a fluorine-containing monomer having a carbon-carbon double bond.